
Versatile & Reliable

NimProbe comes with stylus and corner extension rods of of different types to meet the needs of various applications. From intricate curved surfaces to precision large parts, NimProbe delivers reliable measurements—every time.

It is built for stability and reliability, unaffected by vibration, temperature, humidity, or lighting conditions. With dynamic measurement and real-time position compensation, it maintains high accuracy even in complex workshop environments or outdoor settings.




Туре		NimProbe	
Volumetric accuracy	(3.5m)	0.059 mm	
	(4.2m)	0.072 mm	
Measurement distance (per tracker)		4.2 m	
Part size range (recommended)		0.1 m ~ 6 m	
Dimensions of i-Probe		510*145*89 mm	
Weight of i-Probe		700 g	
Operating temperature range		0 ~ 45°C	
Operating humidity range (non-condensing)		10 ~ 90% RH	
Connection		Wired and wireless	
Number of targets		16	
Patents		ZL201520680513.1, ZL202210065778.5, ZL202221475584.4, ZL202221766958.8, ZL202320545878.8	

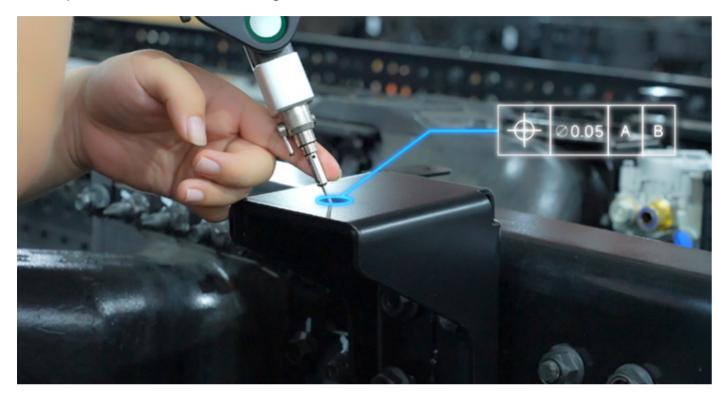



Scanology ürünleri hakkında detaylı bilgi ve demo talepleriniz için;

T +90 (216) 471 82 82 (istanbul) - +90 (224) 441 14 82 (Bursa)info@poligonmuhendislik.com

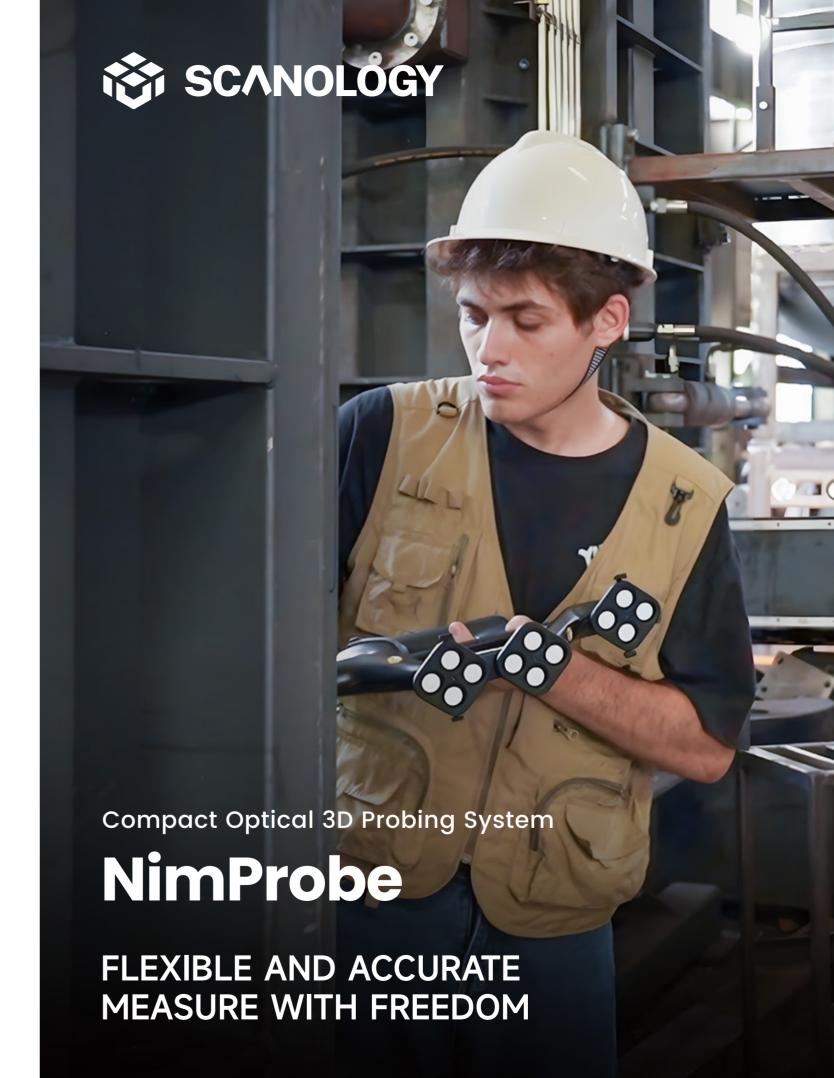



All in One & Easy to Use

NimProbe is lightweight and portable, with the entire system packed into a single case for easy transport and setup. Ready in just one minute, it instantly becomes a mobile measurement station—delivering fast, efficient inspection in workshops, outdoor sites, and other challenging environments.



Seamless Probing to Scanning

NimProbe redefines measurement efficiency with the power of two-in-one. By merging high-precision probing with handheld laser scanning, it breaks free from the limits of traditional probe systems. Its tracker doubles as a handheld 3D scanner, capturing point clouds with speed and precision, while DefinSight software unifies scan and probe data in real time.

Switch effortlessly between scanning and probing to handle any measurement task with ease. Smarter, faster, and more versatile, NimProbe streamlines inspection workflows and adapts seamlessly to third-party platforms—driving the future of modern, intelligent manufacturing.




Extensive and Precise Measurement

When combined with i-Tracker, which has a large field-of-view, i-Probe can measure parts in a distance of up to 4.2 meters in a single position. With advanced optical sensors and cutting-edge algorithms, the system precisely captures geometric features and GD&T, making it ideal for efficient 3D measurement of parts with metrology-grade precision.

Measurement Distance	Volumetric Accuracy	
4.2 m	0.072 mm	
3.5 m	0.059 mm	
100	Comment of	
THE 250		
1000		
1000		
		10
The second liverage with the second liverage w		
The second second		100
The Management of the London		
S 0 P	The second second	
CONTROL OF THE PARTY OF THE PAR	Allert Control of the	

Probing Without Limits

With a 500-mm probe length, the i-Probe easily accesses reference holes, hidden points, and other hard-to-reach areas. Intelligent occlusion compensation algorithm ensures accurate results even when some of its markers are blocked. This makes it the perfect choice for measuring automotive parts, aerospace components, pipelines, holes, and irregular parts.

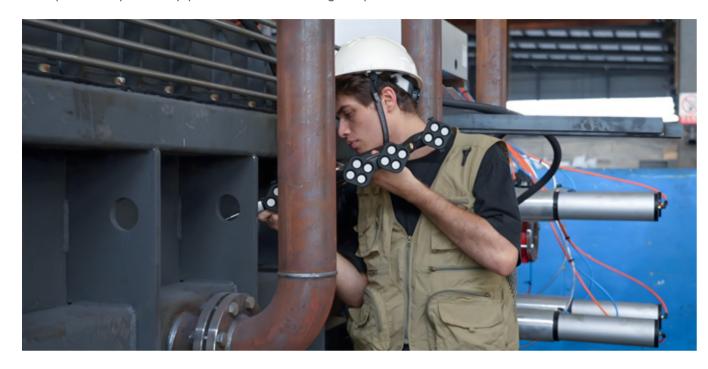

Stay Mobile, Stay Precise

Within the tracker's view, the probe moves freely while its position and orientation are tracked in real time, making it easy to capture hole locations, flatness, parallelism, and more. With only a few markers, you can switch positions effortlessly. Whether it's cross-station measurement, multi-angle probing, or inspection along dynamic production lines, NimProbe adapts instantly and keeps inspection cycles moving fast.



